

61

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

JP Application No. 2000-251412

---

[Name of Document] Application for Patent

[Reference No.] MU11738-01

[Date of Filing] August 22, 2000

[Addressee] Commissioner of the Patent Office

[Int. Cl.] H01P 7/10

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Masayuki ATOKAWA

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Hirofumi MIYAMOTO

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Hajime SUEMASA

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Kikuo TSUNODA

[Inventor]

[Address] c/o Murata Manufacturing Co., Ltd., 26-10,  
Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu

[Name] Yasuo YAMADA

JP Application No. 2000-251412

---

[Applicant for Patent]

[Id. No.] 000006231

[Name] Murata Manufacturing Co., Ltd.

[Agent]

[Id. No.] 100091432

[Patent Attorney]

[Name] Takekazu MORISHITA

[Priority Claim according to Earlier Application]

[Application No.] 2000- 9414

[Application Date] January 18, 2000

[Application Fees]

[Prepayment Registration No.] 007618

[Amount of Payment] 21000

[List of Documents Attached]

[Name of Document] Specification 1

[Name of Document] Drawings 1

[Name of Document] Abstract 1

[No. of General Power of Attorney] 9004894

[Proof] Required

JP Application No. 2000-251412

---

[Name of Document] SPECIFICATION

[Title of the Invention] ELECTRIC FILTER, ANTENNA SHARING  
DEVICE, AND COMMUNICATION DEVICE

[Claims]

[Claim 1] A dielectric filter comprises a dielectric  
block having at least one resonance hole,

input and output terminal electrodes to be connected  
to external circuits, and

a separated electrode provided on the outer face of  
the dielectric block, not connected to the input and output  
terminals and ground.

[Claim 2] A dielectric filter according to claim 1,  
wherein a voltage controllable reactance element and a  
circuit element for controlling the reactance element are  
electrically connected to the separated electrode.

[Claim 3] A dielectric filter according to claim 1 or 2,  
wherein either step or concavity is provided on the  
dielectric block, and the separated electrode is provided  
on the step and in the concavity.

[Claim 4] A dielectric filter according to claim 2 or 3,  
wherein the dielectric block, the reactance element, and  
the circuit element are mounted onto a circuit substrate,  
and the reactance element and the circuit element are  
electrically connected to the separated electrode via a  
circuit pattern provided on the circuit substrate.

JP Application No. 2000-251412

---

[Claim 5] A dielectric filter according to any one of claim 1 to 4, wherein the separated electrode and the input and output terminal electrodes are provided so as to elongate on at least two outer faces of the dielectric block.

[Claim 6] A dielectric filter according to any one of claims 1 to 5, wherein the separated electrodes and the input and output terminal electrodes are provided at least on the under face of the dielectric block.

[Claim 7] A dielectric filter according to any one of claims 1 to 6, wherein the number of the separated electrodes is at least two, and at least two separated electrodes are electrically connected via a coupling adjustment element.

[Claim 8] A dielectric filter comprising a dielectric block having at least one resonance hole,

a conductor inserted into the resonance hole while the conductor is insulated from an inner conductor of the resonance hole,

a voltage-controllable reactance element electrically connected to the conductor, and

a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof.

[Claim 9] A dielectric filter comprising a dielectric

JP Application No. 2000-251412

---

block having at least one resonance hole,

a conductor electrically connected to an inner conductor of the resonance hole,

a voltage-controllable reactance element electrically connected to the conductor, and

a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof.

[Claim 10] A dielectric filter according to any one of claims 2 to 9, wherein the voltage controllable reactance element is one of a PIN diode, a field effect transistor, and a variable capacitance diode.

[Claim 11] An antenna sharing device including the dielectric filter of any one of claims 1 to 10.

[Claim 12] A communication device including the dielectric filter of any one of claims 1 to 10, or an antenna device of claim 11.

[Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

The present invention relates to a dielectric filter for use in a microwave band, an antenna sharing device, and a communication device

[0002]

[Description of the Related Art]

JP Application No. 2000-251412

---

Conventionally, band-pass filters and band-block filters have been known, in which a reactance element such as a PIN diode or variable capacitance diode is connected to a coaxial dielectric resonator, whereby the resonance frequency is shifted by voltage control of the reactance element.

[0003]

FIG. 18 is a plan view showing the configuration of a conventional frequency variable band-pass filter 1. FIG. 19 is an electric circuit diagram of the band-pass filter. The filter 1 comprises resonance circuits coupled in two stages, and comprises dielectric resonators 2 and 3, coupling capacitors 5 to 7, polarization capacitors C1 and C2 for producing an attenuation pole, frequency shifting capacitors C3 and C4, PIN diodes D1 and D2 as reactance elements, inductors L1 and L2 to function as choke coils, control voltage supply resistors R1 and R2, capacitors C8 and C9, and a circuit substrate 5 for mounting these parts. Moreover, P1 designates an input terminal electrode, P2 does an output terminal electrode, CONT1 and CONT 2 do voltage control terminal electrodes, and G1 and G2 do ground patterns.

[0004]

[Problems to be Solved by the Invention]

However, the number of parts contained in the

JP Application No. 2000-251412  
-----

conventional frequency variable band-pass filter 1 is large, so that the miniaturization has been difficult. Especially, the space occupied by the circuit elements such as the PIN diodes D1, D2 or the like provided on the circuit substrate 5 is substantially equal to that by the dielectric resonators 2 and 3.

[0005]

Moreover, conventionally, when the shift degree of a frequency is desired to be increased, the electrostatic capacitances of the frequency shifting capacitors C3 and C4 are increased. However, if the capacitances of the frequency shifting capacitors C3 and C4 are increased, there is caused the problem that the impedance of the resonance circuit, obtained when the PIN diodes D1 and D2 are on and that obtained when the diodes D1 and D2 are off becomes different from each other. Therefore, the pass-band width obtained when the PIN diodes D1 and D2 are on (that is, when the pass frequency of the filter 1 is low) is narrower than that obtained when the diodes D1 and D2 are off (that is, the pass frequency of the filter 1 is high). Accordingly, the shift degree of the frequency has a limitation. The design flexibility is low.

[0006]

Accordingly, it is an object of the present invention to provide a dielectric filter of which the flexibility of



JP Application No. 2000-251412  
-----

the frequency shift degree is high, the number of parts is small, and the size is small, an antenna sharing device, and a communication device.

[0007]

[Means for Solving the Problems and Operation]

To achieve the above object, according to the present invention, a dielectric filter in accordance with the present invention comprises a dielectric block having at least one resonance hole, input and output terminal electrodes to be connected to external circuits, and a separated electrode provided on the outer face of the dielectric block, not connected to the input and output terminals and ground, and connected. The separated electrode and the input and output terminal electrodes are provided on the outer face of the dielectric block and on the surface of a circuit substrate.

[0008]

With the above-described configuration, the resonance hole provided on the dielectric block constitutes a resonator. On the other hand, the separated electrode forms a frequency shifting capacitor. Accordingly, it is unnecessary to provide a conventional frequency shifting capacitor.

[0009]

Furthermore, a voltage controllable reactance element

JP Application No. 2000-251412

---

and a circuit element for controlling the reactance element are electrically connected to the separated electrode. Thereby, the reactance element is voltage-controlled to be switched, so that the frequency shifting capacitor, formed by the separated electrode, is grounded or opened to change the frequency characteristic of the filter. Here, the dielectric block, the reactance element, and the circuit element may be mounted onto the circuit substrate so that the reactance element and the circuit element are electrically connected to the separated electrode via a circuit pattern provided on the circuit substrate. As the voltage controllable reactance element, for example, a PIN diode, field effect transistor, or a variable capacitance diode may be used.

[0010]

Furthermore, by electrically connecting at least two separated electrodes via the coupling adjustment element, the filter band-widths obtained when the voltage controllable reactance element is on and that obtained when the element is off can be independently set. As the coupling adjustment element, for example, a reactance element such as a capacitor, an inductor, or the like, and a variable capacitance capacitor, and so forth may be employed.

[0011]

JP Application No. 2000-251412

---

Moreover, a dielectric filter in accordance with the present invention comprises a dielectric block having at least one resonance hole, a conductor inserted into the resonance hole while the conductor is insulated from an inner conductor of the resonance hole, a voltage-controllable reactance element electrically connected to the conductor, and a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof. Thereby, the inner conductor of the resonance hole and the conductor inserted into the resonance hole form a frequency shifting capacitor. Thus, it is unnecessary to provide a conventional frequency shifting capacitor element.

[0012]

Moreover, a dielectric filter in accordance with the present invention comprises a dielectric block having at least one resonance hole, a conductor electrically connected to an inner conductor of the resonance hole, a voltage-controllable reactance element electrically connected to the conductor, and a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof. Onto the circuit substrate, a circuit element for controlling the frequency shifting capacitor element and the reactance element, and so forth are mounted in addition

JP Application No. 2000-251412

---

to the reactance elements.

[0013]

Moreover, either steps or concavity is provided on the dielectric block, and the separated electrode is provided on the step and in the concavity. Thus, since the reactance element and the circuit element are mounted on the steps and in the concavity, the dielectric filter is reduced in size.

[0014]

The antenna sharing device and the communication device in accordance with the present invention each include at least one of the dielectric filters having the above-described characteristics. Therefore, the design flexibility can be enhanced, and the size can be reduced.

[0015]

[Description of the Embodiments]

Hereinafter, embodiments of the dielectric filter, the antenna sharing device, and the communication device of the present invention will be described in reference to the accompanying drawings. In the respective embodiments, similar components and similar parts are designated by the same reference numerals, and the repeated description is omitted.

[0016]

[First Embodiment, FIGS. 1 to 4]

JP Application No. 2000-251412

---

A frequency variable band-pass dielectric filter 11 contains a single dielectric block 12 having a substantially rectangular parallelepiped shape, as shown in FIG. 1. In the dielectric block 12, two resonance holes 13 and 14 are formed so as to pass through the end faces 12a and 12b opposed to each other of the block 12. The resonance holes 13 and 14 are arranged so that the axes thereof are in parallel to each other in the dielectric block 12. The resonance holes 13 and 14 each have a circular cross section. Inner conductors 16 are formed on the inner walls of the resonance holes 13 and 14. The resonance holes 13 and 14 are electromagnetic field coupled.

[0017]

A step 18 is formed on the upper face 12c of the dielectric block 12. Separated electrodes 24 and 25 are formed on the lower step. Chip parts (described later) such as the PIN diodes D11 and D12, and so forth are mounted thereon. Accordingly, though the chip parts are mounted onto the upper face 12c of the dielectric block 12, the overall height can be reduced to be small. Needless to say, it is not necessary to form the steps 18 on the upper face 12c of the dielectric block 12.

[0018]

On the outer face of the dielectric block 12, an outer conductor 17, an input terminal electrode 21, an output

JP Application No. 2000-251412  
-----

terminal electrode 22, a voltage control terminal electrode 23, and two separated electrodes 24 and 25 are formed. The outer conductor 17 is formed on the outer face of the dielectric block 12 excluding the area where the electrodes 21 to 25 are formed and one 12a (hereinafter, referred to as an opening side end face 12a) of the opening end faces at which the resonance holes 13 and 14 are opened.

[0019]

A pair of the input and output terminal electrodes 21 and 22 are formed so as to elongate from the right and left side-faces 12d and 12e of the dielectric block 12, bend and elongate on the under face 12f, respectively. The voltage control terminal electrode 23 is elongated from the upper face 12c of the dielectric block 12 onto the under face 12f via the side face 12e. The under face 12f is used as a mounting face of the dielectric filter 11. The dielectric filter 11 is mounted onto a printed board or the like while the under face 12f being positioned downward. The separated electrodes 24 and 25 are formed on the upper face 12c of the dielectric block 12 so as not to be connected to the outer conductor 17 and the other electrodes 21 to 23.

[0020]

The inner conductors 16 of the resonance holes 13 and 14 are electrically opened (separated) from the outer conductor 17 at the opening side end face 12a, and are

JP Application No. 2000-251412

---

electrically short-circuited (connected) to the outer conductor 17 at the other opening end face 12b (hereinafter, referred to as a short-circuited side end face 12b).

Accordingly, in the dielectric block 12, the resonance holes 13 and 14 and the inner conductors 16 form  $1/4$  wavelength dielectric resonators R1 and R2, respectively.

[0021]

Moreover, onto the upper face 12c of the dielectric block 12, PIN diodes D11 and D12 as the voltage controllable reactance elements, and inductors L11 and L12 for voltage-controlling the PIN diodes D11 and D12, and a coupling adjustment capacitor C11 are mounted. The PIN diode D11 is electrically connected between the outer conductor 17 and the separated electrode 24 by means of solder or a conductive paste. The PIN diode D12 is electrically connected between the outer conductor 17 and the separated electrode 25. The inductor L11 and the coupling adjustment capacitor C11 are connected in parallel to each other between the separated electrodes 24 and 25. The inductor L12 is electrically connected between the separated electrode 25 and the voltage control terminal electrode 23.

[0022]

For the purpose of facilitating soldering work for the respective components, a solder resist film may be printed

JP Application No. 2000-251412

---

on the upper face 12c. Moreover, in some cases, the inductors L11 and L12 and the coupling adjustment capacitor C11 don't need to be mounted, since they are mounted onto a printed board or the like for a communication device by a set maker as a user, for example. Furthermore, the opening side end face 12a of the dielectric block 12 may be covered with a metallic sheet or the like for enhancement of the electromagnetic shield property of the dielectric filter 11.

[0023]

FIG. 2 shows an electrically equivalent circuit diagram of the dielectric filter 11 constituted as described above. The dielectric filter 11 includes resonance circuits coupled in two stages. The dielectric resonator R1 is electrically connected to the input terminal electrode 21 via a coupling capacitor C13. The dielectric resonator R2 is electrically connected to the output terminal electrode 22 via a coupling capacitor C14.

[0024]

The coupling capacitor C13 is formed, due to the generation of electrostatic capacitance between the input terminal electrode 21 and the inner conductors 16 of the resonance hole 13. Similarly, the coupling capacitor C14 is formed, due to the generation of electrostatic capacitance between the output terminal electrode 22 and the inner conductors 16 of the resonance hole 14. The



JP Application No. 2000-251412

---

dielectric resonators R1 and R2 are electromagnetic field coupled (indicated by reference character K in FIG. 2), caused by the inner conductors 16 of the resonance holes 13 and 14 opposed to each other at an predetermined interval. Furthermore, electrostatic capacitances are generated between the input and output terminal electrodes 21 and 22 and the outer conductor 17, and thereby, capacitors C12 and c15 are formed with one ends thereof being grounded, respectively.

[0025]

A frequency shifting capacitor Cs1 is formed, due to generation of an electrostatic capacitance between the separated electrode 24 and the inner conductors 16 of the resonance hole 13. Similarly, a frequency shifting capacitor Cs2 is formed, due to generation of an electrostatic capacitance between the separated electrode 25 and the inner conductor 16 of the resonance hole 14. One end of the frequency shifting capacitor Cs1 is electrically connected to the open end of the dielectric resonator R1, and the other end is electrically connected to the anode of the PIN diode D11. One end of the frequency shifting capacitor Cs2 is electrically connected to the open end of the dielectric resonator R2, and the other end is electrically connected to the anode of the PIN diode D12. The cathodes of the PIN diodes D11 and D12 are

JP Application No. 2000-251412

---

grounded, respectively.

[0026]

The parallel circuit of the inductor L11 to function as a choke coil and the coupling adjustment capacitor C11 is connected between an intermediate connection point of the anode of the PIN diode D11 and the frequency shifting capacitor Cs1, and that of the anode of the PIN diode D12 and the frequency shifting capacitor Cs2.

[0027]

The voltage control terminal electrode 23 is electrically connected to the anode of the PIN diode D12 via the inductor L12 to function as a choke coil, and moreover, is electrically connected to the anode of the PIN diode D11 via the inductors L11 and L12.

[0028]

As described above, in the dielectric filter 11, the frequency shifting capacitors Cs1 and Cs2 are formed by the separated electrodes 24 and 25 provided on the upper face of the dielectric block 12, and the inner conductors 16 of the resonance holes 13 and 14, respectively. Moreover, coupling between the dielectric resonators R1 and R2 is performed by utilizing the electromagnetic coupling K between the inner conductors 16 of the resonance holes 13 and 14. That is, conventional frequency shifting capacitors and coupling capacitor between the resonators,

JP Application No. 2000-251412

---

which are separate parts from the dielectric resonators, can be omitted.

[0029]

Moreover, the chip parts such as the PIN diodes D11 and D12 or the like are mounted directly onto the dielectric block 12. Accordingly, the area occupied by the printed circuit substrate or the like of a communication device can be reduced by an amount corresponding to the direct coupling of the chip parts. Furthermore, the filter 11 having an attenuation pole can be obtained by forming the dielectric block 12 to have a predetermined shape, if necessary. Accordingly, a conventional polarization capacitor becomes unnecessary. Thus, the filter can be more reduced in size.

[0030]

Next, the working effects of the dielectric filter 11 will be described.

The pass frequency of the dielectric filter 11 is determined by the resonance frequency of a resonance system comprising the frequency shifting capacitor Cs1 and the dielectric resonator R1 and that of a resonance system comprising the frequency shifting capacitor Cs2 and the dielectric resonator R2. That is, when a positive voltage as a control voltage is applied to the voltage control terminal electrode 23, the PIN diodes D11 and D12 become on.

JP Application No. 2000-251412

---

Accordingly, as shown in FIG. 3, the frequency shifting capacitors Cs1 and Cs2 are grounded via the PIN diodes D11 and D12, respectively, so that the pass frequency is decreased. At this time, the coupling adjustment capacitor C11 exerts no influences, since it is grounded. The dielectric resonators R1 and R2 are coupled to each other via electromagnetic coupling K. Thus, the pass bandwidth of the dielectric filter 11 is set.

[0031]

To the contrary, when a negative voltage is applied as a control voltage to the voltage control terminal electrode 23, the PIN diodes D11 and D12 become off. Thereby, the frequency shifting capacitors Cs1 and Cs2 become open, and the pass frequency is increased. Then, the dielectric resonators R1 and R2 are coupled to each other via the electromagnetic field coupling K and the capacitive coupling caused by the frequency shifting capacitors Cs1 and Cs2, and the coupling adjustment capacitor C11. Accordingly, the pass bandwidth obtained when the PIN diodes D11 and D12 are off and that obtained when the PIN diodes D11 and D12 are on can be independently set with parts in a reduced number and a small consumption current.

[0032]

As described above, the frequency shifting capacitors Cs1 and Cs2 are grounded or opened by the voltage control.

JP Application No. 2000-251412

---

Thus, the dielectric filter 11 has two different pass frequency characteristics, and moreover, the respective pass bandwidths can be independently set. In the first embodiment, the capacitor C11 is used for adjustment of coupling between the dielectric resonators R1 and R2. However, an inductor or a voltage controllable reactance element such as a variable capacitance capacitor or the like may be used, if necessary.

[0033]

[Second Embodiment FIG. 5]

In a frequency variable dielectric filter 31, the outer conductor 17, the input terminal electrode 21, the output terminal electrode 22, and the two separated electrodes 34 and 35 are formed as shown in FIG. 5.

[0034]

The separated electrodes 34 and 35 are formed on the opening side end-face 12a of the dielectric block 12 so as not to be electrically connected to the outer conductor 17 and the input and output terminal electrodes 21 and 22. The separated electrode 35 is elongated from the opening side end-face 12a onto the under face 12f. A part of the respective separated electrodes 34 and 35 are elongated into the resonance holes 13 and 14. The inner conductors 16 of the resonance holes 13 and 14 are opposed to the separated electrodes 34 and 35 elongating in the resonance

JP Application No. 2000-251412

---

holes 13 and 14 so as to sandwich conductor non-formation portions 32, in the vicinity of the opening side end-face 12a, respectively.

[0035]

Moreover, the PIN diodes D11 and D12 and the coupling adjustment capacitor C11 are mounted on the opening side end-face 12a of the dielectric block 12. The PIN diode D11 is electrically connected between the outer conductor 17 and the separated electrode 34. The PIN diode D12 is electrically connected between the outer conductor 17 and the separated electrode 35. The coupling adjustment capacitor C11 is electrically connected between the separated electrodes 34 and 35.

[0036]

In the dielectric filter 31 having the above-described configuration, the frequency shifting capacitor Cs1 is formed by the separated electrode 34 and the inner conductor 16 of the resonance hole 13 opposed to each other so as to sandwich the conductor non-formation portion 32. Similarly, the frequency shifting capacitor Cs2 is formed by the separated electrode 35 and the inner conductors 16 of the resonance hole 14 opposed to each other so as to sandwich the conductor non-formation portion 32. As a result, the dielectric filter 31 can be reduced in size. As compared with the filter 11 of the above-described first

JP Application No. 2000-251412

-----

embodiment, the height of the dielectric filter 31 can be more reduced.

[0037]

[Third Embodiment FIG. 6]

As shown in FIG. 6, in a frequency variable dielectric filter 41, the outer electrode 17, the input terminal electrode 21, the output terminal electrode 22, the voltage control terminal electrode 23, and two separated electrodes 44 and 45 are formed on the outer face of the dielectric block 12.

[0038]

The separated electrodes 44 and 45 are formed on the opening side end face 12a of the dielectric block 12 so as not to be electrically connected to the outer conductor 17 and the other electrodes 21 to 23. The separated electrode 44 is elongated from the opening side end-face 12a onto the side face 12e. The separated electrode 45 is elongated from the opening side end-face 12a onto the side face 12d. A part of the respective separated electrodes 44 and 45 are elongated in the resonance holes 13 and 14. The inner conductors 16 of the resonance holes 13 and 14 are opposed, via the conductor non-formation portions 32, to the separated electrodes 44 and 45 elongating in the resonance holes 13 and 14, in the vicinity of the opening side end-face 12a, respectively.

JP Application No. 2000-251412

---

[0039]

Moreover, the PIN diodes D11 and D12 are mounted to both of the side faces 12e and 12d of the dielectric block 12, respectively. The inductors L11 and L12 are mounted onto the opening side end-face 12a. The PIN diode D11 is electrically connected between the outer conductor and the separated electrode 44. The PIN diode D12 is electrically connected between the outer conductor 17 and the separated electrode 45. The inductor L11 is electrically connected between the separated electrodes 44 and 45. The inductor L12 is electrically connected between the separated electrode 45 and the voltage control terminal electrode 23.

[0040]

In the dielectric filter 41 having the above-described configuration, the frequency shifting capacitor Cs1 is formed by the separated electrode 44 and the inner conductor 16 of the resonance hole 13 opposed to each other via the conductor non-formation portion 32. Similarly, the frequency shifting capacitor Cs2 is formed by the separated electrode 45 and the inner conductor 16 of the resonance hole 14 opposed to each other via the conductor non-formation portion 32. As a result, the dielectric filter 41 can be reduced in size.

[0041]

[Fourth Embodiment FIG. 7]



JP Application No. 2000-251412

---

As shown in FIG. 7, in a frequency variable dielectric filter 51, the dielectric block 12 is mounted onto a circuit substrate 60 having the PIN diodes D11 and D12 and the inductors L11 and L12 mounted thereto.

[0042]

On the upper face of the circuit substrate 60, an input electrode pattern 61, an output electrode pattern 62, and a voltage control electrode pattern 63, relay electrode patterns 65 and 66, and a wide area ground pattern 64 are formed. The PIN diode D11 is electrically connected between the ground pattern 64 and the relay electrode pattern 65. The PIN diode D12 is electrically connected between the ground pattern 64 and the relay electrode pattern 66. The inductor L11 is electrically connected between the relay electrode patterns 65 and 66. The inductor L12 is electrically connected between the relay electrode pattern 66 and the voltage control electrode pattern 63.

[0043]

Meanwhile, on the outer face of the dielectric block 12, the outer conductor 17, the input terminal electrode 21, the output terminal electrode 22, and two separated electrodes 54 and 55 are formed. The separated electrodes 54 and 55 are formed on the under face 12f of the dielectric block 12, respectively, so as not to be

JP Application No. 2000-251412

---

electrically connected to the outer conductor 17 and the input and output terminal electrodes 21 and 22.

[0044]

The dielectric block 12 is mounted onto the circuit substrate 60 by use of solder, an electrically conductive paste, or the like. Thereby, the input terminal electrode 21 of the dielectric block 12 is electrically connected to the input electrode pattern 61 of the circuit substrate 60. Similarly, the output terminal electrode 22 is electrically connected to the output electrode pattern 62. The separated electrodes 54 and 55 are electrically connected to the relay electrode patterns 65 and 66, respectively. The outer conductor 17 is electrically connected to the ground pattern 64.

[0045]

In the dielectric filter 51 having the above-described configuration, the frequency shifting capacitor Cs1 is formed, due to generation of an electrostatic capacitance between the separated electrode 54 and the inner conductors 16 of the resonance holes 13. Similarly, the frequency shifting capacitor Cs2 is formed, due to generation of an electrostatic capacitance between the separated electrode 55 and the inner conductors 16 of the resonance holes 14. Accordingly, the dielectric filter 51 has the same equivalent electric circuit as that of the electric circuit

JP Application No. 2000-251412

---

of FIG. 2 excepting that the coupling adjustment capacitor C11 is excluded. As a result, the small-sized dielectric filter 51 can be obtained.

[0046]

[Fifth Embodiment FIG. 8]

As shown in FIG. 8, a frequency variable dielectric filter 71 comprises a circuit substrate 80 having the PIN diodes D11 and D12 and the inductors L11 and L12 mounted thereto, bonded to the opening side end-face 12a of the dielectric block 12.

[0047]

On the front side of the circuit substrate 80, relay electrode patterns 81 and 82, a ground pattern 85, and a voltage control electrode pattern 86 are formed. The relay electrode patterns 81 and 82 are connected to relay electrode patterns 81a and 82a formed on the back side of the circuit substrate 80, via through-holes 83 provided in the circuit substrate 80. The PIN diode D11 is electrically connected between the ground pattern 85 and the relay electrode pattern 82. The PIN diode D12 is electrically connected between the ground pattern 85 and the relay electrode pattern 81. The inductor L11 is electrically connected between the relay electrode patterns 81 and 82. The inductor L12 is electrically connected between the relay electrode pattern 81 and the voltage

JP Application No. 2000-251412

---

control electrode pattern 86.

[0048]

Meanwhile, the outer conductor 17, the input terminal electrode 21, the output terminal electrode 22, two separated electrodes 74 and 75 are formed on the outer surface of the dielectric block 12. The separated electrodes 74 and 75 are formed on the opening side end-face 12a of the dielectric block 12 so as not to be electrically connected to the outer conductor 17, and the input and output terminal electrodes 21 and 22. The inner conductors of the resonance holes 13 and 14 are opposed, via the conductor non-formation portions 32, to the separated electrodes 74 and 75 elongating in the resonance hole 13 and 14. so as to sandwich the conductor non-formation portion 32, in the vicinity of the opening side end face 12a.

[0049]

When the circuit substrate 80 is bonded to the opening side end face 12a of the dielectric block 12, the relay electrode patterns 81a and 82a of the circuit substrate 80 are electrically connected to the separated electrodes 74 and 75 of the dielectric block 12, respectively.

[0050]

In the dielectric filter 71 having the above-described configuration, the frequency shifting capacitor Cs1 is

JP Application No. 2000-251412

---

formed by the separated electrode 75 and the inner conductor 16 of the resonance hole 13 opposed to each other so as to sandwich the conductor non-formation portions 32. Similarly, the frequency shifting capacitor Cs2 is formed by the separated electrode 74 opposed to the inner conductor 16 of the resonance hole 14 so as to sandwich the conductor non-formation portion 32 and generate electrostatic capacitive coupling.

[0051]

Accordingly, the dielectric filter 71 has substantially the same equivalent circuit as that of the electric circuit shown in FIG. 2 excepting that the coupling adjustment capacitor C11 is excluded. As a result, the dielectric filter 71 can be reduced in size. The height of the filter 71 can be more reduced as compared with the filter 51 of the fourth embodiment.

[0052]

[Sixth Embodiment FIG. 9]

In the dielectric filters described in the first to fifth embodiments, the frequency shifting capacitors are formed by means of the separated electrodes formed on the surfaces of the dielectric blocks, respectively. However, the shapes of the separated electrodes have a limitation. Therefore, with such separated electrodes, electrostatic capacitances can not be satisfactorily produced.

JP Application No. 2000-251412

---

Accordingly, in the sixth embodiment, a dielectric filter containing a frequency shifting coupling capacitor having a large electrostatic capacitance is described.

[0053]

As shown in FIG. 9, a frequency variable dielectric filter 91 comprises the dielectric block 12, the circuit substrate 80 having the PIN diodes D11 and D12 or the like mounted thereon, insulation members 92 and 93 having a desired dielectric constant, and metallic pins 94 and 95. The columnar insulation members 92 and 93, while they have the metallic pins 94 and 95 inserted under pressure into the central axial portions thereof, are inserted into the resonance holes 14 and 13, respectively. The circuit substrate 80 is arranged so as to be opposed to the opening side end-face 12a of the dielectric block 12, and the heads of the metallic pins 94 and 95 are inserted through the through-holes 83 of the circuit-substrate 80 and soldered.

[0054]

In the dielectric filter 91 having the above-described configuration, the frequency shifting capacitor Cs1 is formed by generation of an electrostatic capacitance between the metallic pin 95 and the inner conductor 16 of the resonance hole 13. The frequency shifting capacitor Cs2 is formed by generation of an electrostatic capacitance between the metallic pin 94 and the inner conductor 16 of

JP Application No. 2000-251412

---

the resonance hole 14. Thus, the frequency shifting capacitors Cs1 and Cs2 have the structure of a so-called coaxial capacitor, and therefore, have a large electrostatic capacitance, respectively. The dielectric capacitor 91 has substantially the same equivalent circuit as that of the electric circuit of FIG. 2 excepting that the coupling adjustment capacitor C11 is excluded.

[0055]

In the dielectric capacitor 91, the input and output terminal electrodes 21 and 22 may be provided on the circuit substrate 80, not on the front surface of the dielectric block 12. Moreover, the electromagnetic shield property may be enhanced by providing the conductor non-formation portions 32 in the inner conductors 16 of the resonance holes 13 and 14 as shown in FIG. 5, and covering the opening side end face 12a of the dielectric block 12 with the outer conductor 17.

[0056]

[Seventh Embodiment FIG. 10]

In the seventh embodiment, the frequency shifting capacitors Cs1 and Cs2 are formed of the chip capacitors, if a sufficient electrostatic capacitance can not be obtained by means of the separated electrodes. As shown in FIG. 10, a frequency variable dielectric filter 101 comprises the dielectric block 12, the circuit substrate 80

JP Application No. 2000-251412

---

having the PIN diodes D11 and D12 and so forth mounted thereto, and connecting members 102 and 103. The connecting members 102 and 103 are formed by punching a metallic sheet having a spring-like property, and bending-working. The connecting members 102 and 103 are electrically connected to the inner conductors 16 by inserting the feet 104 thereof having a spring-like property into the resonance holes 14 and 13, respectively. Thus, the members 102 and 103 are secured to the dielectric block 12.

[0057]

The circuit substrate 80 is arranged so as to be opposed to the opening side end-face 12a of the dielectric block 12. The heads of the connecting members 102 and 103 are soldered to the relay electrode patterns 81a and 82a formed on the back side of the circuit substrate 80. On the front side of the circuit substrate 80, the relay electrode patterns 81, 82, 88a, and 88b, the voltage control electrode pattern 86, and the voltage control electrode pattern 86, and the ground patterns 89a and 89b are provided. To the circuit substrate 80, the chip capacitors Cs1 and Cs2 as the frequency shifting capacitors are mounted, in addition to the PIN diodes D11 and D12 and the inductors L11 and L12.

[0058]



JP Application No. 2000-251412

---

[Eighth Embodiment FIG. 11]

The eighth embodiment is substantially the same as the first embodiment excepting that a concavity 112 is provided, instead of the steps 18 of the dielectric filter 11 of the first embodiment. As shown in FIG. 11, in the frequency variable dielectric filter 111, the concavity 112 is formed on the upper face 12c of the dielectric block 12.

[0059]

The two separated electrodes 24 and 25, together with a part of the outer conductor 17 and the voltage control terminal electrode 23, are formed in the concavity 112 on the upper face 12c of the dielectric block 12 so as not to be electrically connected to the outer conductor 17 and the other electrodes 21 to 23. In the concavity 112, the PIN diodes D11 and D12, and the inductors L11 and L12 are mounted. The PIN diode D11 is electrically connected between the outer conductor 17 and the separated electrode 24. The PIN diode D12 is electrically connected between the outer conductor 17 and the separated electrode 25. The inductor L11 is electrically connected between the separated electrodes 24 and 25 in parallel to them. The inductor L12 is electrically connected between the separated electrode 25 and the voltage control terminal electrode 23.

[0060]

JP Application No. 2000-251412  
-----

In the dielectric filter 111 having the above-described configuration, the frequency shifting capacitors Cs1 and Cs2 are formed by the separated electrodes 24 and 25 formed on the upper face 12c of the dielectric block 12 and the inner conductors 16 of the resonance holes 13 and 14. Furthermore, the PIN diodes D11 and D12 and the inductors L11 and L12 are mounted in the concavity 112 on the upper face 12c of the dielectric block 12. Accordingly, the dielectric filter 111 can be reduced in size.

[0061]

[Ninth Embodiment FIGS. 12 to 14]

FIG. 12 is an exploded perspective view showing the ninth embodiment of the dielectric filter of the present invention. FIG. 13 is a cross section taken along line XIII - XIII before the PIN diodes are mounted as shown in FIG. 12. FIG. 14 is a cross section taken along line XIV - XIV before the PIN diodes are mounted as shown in FIG. 12.

[0062]

As shown in FIG. 12, the frequency variable band-pass dielectric filter 121 is substantially the same as the dielectric filter 11 of the first embodiment, excepting that the PIN diodes D11 and D12 are mounted in the resonance holes 13 and 14, respectively. Concretely, the outer conductor 17, the input terminal electrode 21, the output terminal electrode 22, and the separated electrodes

JP Application No. 2000-251412

---

24 and 25 are formed on the outer face of the single dielectric block 12 having a substantially rectangular parallelepiped shape. A step 18 is formed on the upper face 12c of the dielectric block 12. The inductors L11 and L12 are mounted on the lower step. Furthermore, the PIN diodes D11 and D12 are formed in the resonance holes 13 and 14. For the purpose of mounting the PIN diodes D11 and D12, the hole diameters at the opening side end-face 12a of the resonance holes 13 and 14 are set to be larger than those at the short-circuited side end-face 12b thereof.

[0063]

The separated electrodes 24 and 25 are formed on the lower step of the steps 18 on the upper face 12c of the dielectric block 12 so as not to be electrically connected to the outer conductor 17 and the voltage control terminal electrode 23. As shown in FIG. 13, the separated electrodes 24 and 25 are elongated from the upper face 12c to the substantially central positions of the resonance holes 13 and 14 via the opening side end-face 12a and the inner wall upper-surfaces of the resonance holes 13 and 14, respectively. The separated electrodes 24 and 25 are extended on the whole of the circumferences of the inner wall surfaces of the resonance holes 13 and 14 substantially in the centers of the resonance holes 13 and 14, respectively. The inner conductors 16 of the resonance

JP Application No. 2000-251412

---

holes 13 and 14 are opposed to the separated electrodes 24 and 25 elongating in the resonance holes 13 and 14. Furthermore, as shown in FIG. 14, the outer conductor 17 is elongated onto the inner wall lower-surfaces of the resonance holes 13 and 14, in the vicinity of the opening side end-face 12a.

[0064]

The PIN diode D11 is electrically connected between the outer conductor 17 and the separated electrode 24 in the resonance hole 13. The PIN diode D12 is electrically connected between the outer conductor 17 in the resonance hole 14 and the separated electrode 25 in the resonance hole 14. The inductor L11 is electrically connected between the separated electrodes 24 and 25. The inductor L12 is electrically connected between the separated electrode 25 and the voltage control terminal electrode 23.

[0065]

In the dielectric filter 121 having the above-described configuration, the frequency shifting capacitor Cs1 is formed by the separated electrode 24 and the inner conductor 16 of the resonance hole 13 opposed to the each other so as to sandwich the conductor non-formation portion 32. Similarly, the frequency shifting capacitor Cs2 is formed by the separated electrode 25 and the inner conductor 16 of the resonance hole 13 opposed to the each

JP Application No. 2000-251412

---

other so as to sandwich the conductor non-formation portion 32. Moreover, the inductors L11 and L12 are mounted onto the lower step of the steps 18, and moreover, the PIN diodes D11 and D12 are mounted in the resonance holes 13 and 14, respectively. Therefore, the dielectric filter 121 can be reduced in size.

[0066]

[Tenth Embodiment FIG. 15]

As shown in FIG. 15, the tenth embodiment is the same as the second embodiment, excepting that a concavity 132 is formed on the opening side end-face 12a of the dielectric block 12 of the dielectric filter 31.

[0067]

The separated electrodes 34 and 35, together with a part of the outer conductor 17, are formed in the concavity 132 on the opening side end-face 12a of the dielectric block 12 so as not to be electrically connected to the outer conductor 17 and the input and output terminal electrodes 21 and 22. The separated electrode 35 is elongated from the opening side end-face 12a onto the under face 12f. A part of the separated electrodes 34 and 35 are elongated in the resonance holes 13 and 14. The inner conductors 16 of the resonance holes 13 and 14 are opposed to the separated electrodes 34 and 35 elongating in the resonance holes 13 and 14 so as to sandwich the conductor

JP Application No. 2000-251412

---

non-formation portions 32, in the vicinity of the opening side end face 12a, respectively.

[0068]

Moreover, the PIN diodes D11 and D12, and the coupling adjustment capacitor C11 are mounted in the concavity 132 on the opening side end face 12a of the dielectric block 12. The PIN diode D11 is electrically connected between the outer conductor 17 and the separated electrode 34. The PIN diode D12 is electrically connected between the outer conductor 17 and the separated electrode 35. The coupling adjustment capacitor C11 is electrically connected between the separated electrodes 34 and 35.

[0069]

In the dielectric filter 131 having the above-described configuration, the frequency shifting capacitor Cs1 is formed by the separated electrode 34 and the inner conductor 16 of the resonance hole 13 opposed to each other so as to sandwich the conductor non-formation portion 32. Moreover, the PIN diodes D11 and D12 and the coupling adjustment capacitor C11 are mounted in the concavity 132 on the opening side end face 12a of the dielectric block 12. Therefore, the dielectric filter 131 can be reduced in size.

[0070]

[Eleventh Embodiment FIG. 16]

The eleventh embodiment describes an embodiment of the

JP Application No. 2000-251412  
-----

antenna sharing device of the present invention. As shown in FIG. 16, in an antenna sharing device 141, a transmission filter 142 is electrically connected between a transmission terminal Tx and an antenna terminal ANT. A reception filter 143 is electrically connected between a reception terminal Rx and the antenna terminal ANT. Here, as the transmission filter 142 and the reception filter 143, the filters 11, 31, 41, 51, 71, 91, 101, 111, 121, and 131 of the first to tenth embodiments may be employed. By mounting the filter 11 or the like, the antenna sharing device 141 of which the design flexibility is large, and the size is reduced can be realized.

[0071]

[Twelfth Embodiment FIG. 17]

The twelfth embodiment describes an embodiment of the communication device of the present invention by way of a portable telephone.

[0072]

FIG. 17 is an electric circuit block diagram of the RF part of a portable telephone 150. In FIG. 17, an antenna element is designated by reference numeral 152, a duplexer by 153, a transmission side isolator by 161, a transmission side amplifier by 162, a transmission side interstage band-pass filter by 163, a transmission side mixer 164, a reception side amplifier by 165, a reception side

JP Application No. 2000-251412

---

interstage band pass filter by 166, a reception side mixer by 167, a voltage control oscillation device (VCO) by 168, and a local band-pass filter by 169.

[0073]

Here, as the duplexer 153, for example, the antenna sharing device 141 of the above-described eleventh embodiment can be employed. Furthermore, as the transmission-side and reception-side interstage band-pass filters 163 and 166, and the local band-pass filter 169, for example, the dielectric filters 11, 31, 41, 51, 71, 91, 101, 111, 121, and 131 of the first to tenth embodiments, or the like can be employed. By mounting the antenna sharing device 141, the dielectric filter 11, or the like, the design flexibility of the RF part can be enhanced, and a small sized portable telephone can be realized.

[0074]

[Other Embodiments]

The dielectric filter, the antenna sharing device, and the communication device of the present invention are not limited to the above-described embodiments, and can be variously modified without departing from the spirit and scope of the invention. As the voltage controllable reactance element, a field effect transistor, a variable capacitance diode, or the like may be employed. Furthermore, the dielectric block may have at least one



JP Application No. 2000-251412

---

resonance hole.

[0075]

[Advantages]

As described above, according to the present invention, the separated electrodes form the frequency shifting capacitors. Accordingly, conventional frequency shifting capacitor elements can be omitted. The voltage controllable reactance element and the circuit element for controlling the reactance element are electrically connected to the separated electrodes. Thereby, the reactance element can be voltage controlled to be switched whereby the frequency shifting coupling capacitors formed by the separated electrodes are grounded or opened to change the frequency characteristic of the filter.

[0076]

Moreover, by electrically connecting at least two separated electrodes via the coupling adjustment element, the coupling degree between the resonators obtained when the voltage controllable reactance element is on, and that obtained when the voltage controllable reactance element is off can be independently set by use of a smaller number of parts and a less consumption current. As a result, an antenna device and a communication device of which the design flexibilities are large, and the sizes are reduced can be obtained.

JP Application No. 2000-251412

---

[0077]

The dielectric filter in accordance with the present invention comprises a dielectric block having at least one resonance hole, a conductor inserted into the resonance hole while the conductor is insulated from an inner conductor of the resonance hole, a voltage-controllable reactance element electrically connected to the conductor, and a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof. Accordingly, a conventional frequency shifting capacitor doesn't need to be provided, since the inner conductor in the resonance hole and the conductor inserted into the resonance hole form a frequency shifting capacitor.

[0078]

The dielectric filter in accordance with the present invention comprises a dielectric block having at least one resonance hole, a conductor electrically connected to an inner conductor of the resonance hole, a voltage-controllable reactance element electrically connected to the conductor, and a circuit substrate for the reactance element to be mounted onto, disposed on an outer face of the dielectric block excluding the under face thereof. Therefore, on the circuit substrate, a circuit element for controlling the frequency shifting capacitor element and

JP Application No. 2000-251412

---

the reactance element, and so forth can be mounted. Thus, the filter can be reduced in size.

[0079]

Moreover, either steps or concavity is provided on the dielectric block, and the separated electrode is provided on the steps or in the concavity. Since the reactance element and the circuit element can be mounted on the step or in the concavity, the size of the dielectric filter can be reduced.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1]

FIG. 1 is an exploded perspective view of a dielectric filter according to a first embodiment of the present invention.

[FIG. 2]

FIG. 2 is an electrically equivalent circuit diagram of the dielectric filter of FIG. 1.

[FIG. 3]

FIG. 3 is an electric circuit diagram illustrating the motion of the dielectric filter, carried out when a PIN diode is on.

[FIG. 4]

FIG. 4 is an electric circuit diagram illustrating the motion of the filter when the PIN diode is off.

[FIG. 5]

JP Application No. 2000-251412

---

FIG. 5 is an exploded perspective view of a dielectric filter according to a second embodiment of the present invention.

[FIG. 6]

FIG. 6 is an exploded perspective view of a dielectric filter according to a third embodiment of the present invention.

[FIG. 7]

FIG. 7 is an exploded perspective view of a dielectric filter according to a fourth embodiment of the present invention.

[FIG. 8]

FIG. 8 is an exploded perspective view of a dielectric filter according to a fifth embodiment of the present invention.

[FIG. 9]

FIG. 9 is an exploded perspective view of a dielectric filter according to a sixth embodiment of the present invention.

[FIG. 10]

FIG. 10 is an exploded perspective view of a dielectric filter according to a seventh embodiment of the present invention.

[FIG. 11]

FIG. 11 is an exploded perspective view of a

JP Application No. 2000-251412

-----

dielectric filter according to an eighth embodiment of the present invention.

[FIG. 12]

FIG. 12 is an exploded perspective view of a dielectric filter according to a ninth embodiment of the present invention.

[FIG. 13]

FIG. 13 is a cross sectional view taken along line XIII-XIII before the PIN diodes are mounted as shown in FIG. 12.

[FIG. 14]

FIG. 14 is a cross sectional view taken along line XIV-XIV before the PIN diodes are mounted as shown in FIG. 12.

[FIG. 15]

FIG. 15 is an exploded perspective view of a dielectric filter according to a tenth embodiment.

[FIG. 16]

FIG. 16 is an electric circuit block diagram of an antenna sharing device according to an embodiment of the present invention.

[FIG. 17]

FIG. 17 is an electric circuit block diagram of the communication device of the present invention.

[FIG. 18]

JP Application No. 2000-251412

---

FIG. 18 is a plan view of a conventional dielectric filter.

[FIG. 19]

FIG. 19 is an electric circuit diagram of the dielectric filter of FIG. 18.

[Reference Numerals]

11, 31, 41, 51, 71, 91, 101, 111, 121, 131 :  
dielectric filter

12: dielectric block

12f: under face

13, 14: resonance hole

16: inner conductor

17: outer conductor

18: steps

21: input terminal electrode

22: output terminal electrode

24, 25: separated electrode

60, 80: circuit substrate

92, 93: insulation member

94, 95: metallic pin

102, 103: connecting member

112, 132: concavity

141: antenna sharing device

150: portable telephone

153: duplexer

JP Application No. 2000-251412

---

C11: capacitor (coupling adjustment element)

D11, D12: PIN diode (voltage controllable reactance  
element)

L11, L12: inductor (circuit element for controlling  
reactance element)

JP Application No. 2000-251412

---

[Name of Document] ABSTRACT

[Abstract]

[Object] To provide a dielectric filter of which the flexibility of a frequency shift degree is large, the number of parts is small, and the size is small, an antenna sharing device, and a communication device.

[Solving Means] An outer conductor 17, an input terminal electrode 21, an output terminal electrode 22, a voltage controllable terminal electrode 23, and two separated electrodes 24 and 25 are formed on the outer face of a dielectric block 12. Furthermore, on the upper face 12c of the dielectric block 12, PIN diode D11 and D12 which are voltage controllable reactance elements, and inductors L11 and L12 for voltage-controlling the PIN diodes D11 and D12, and a coupling adjustment capacitor C11 are mounted. Frequency shifting capacitors Cs1 and Cs2 are formed by generation of electrostatic capacitances between the separated electrodes 24 and 25 and the inner conductors 16 of the resonance holes 13 and 14, respectively.


[Selected Figure] FIG. 1









~~【図5】~~ [FIG.5]

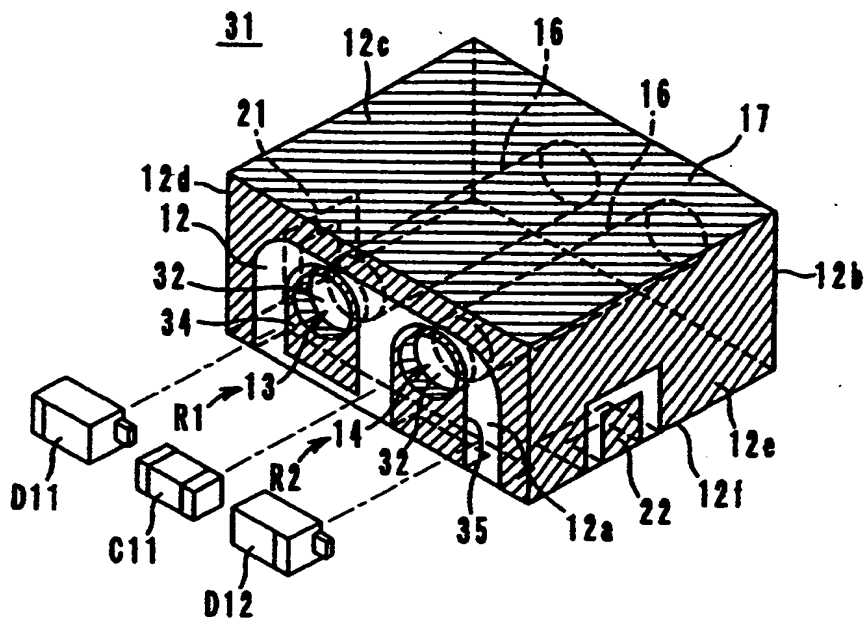


~~【図6】~~ [FIG.6]

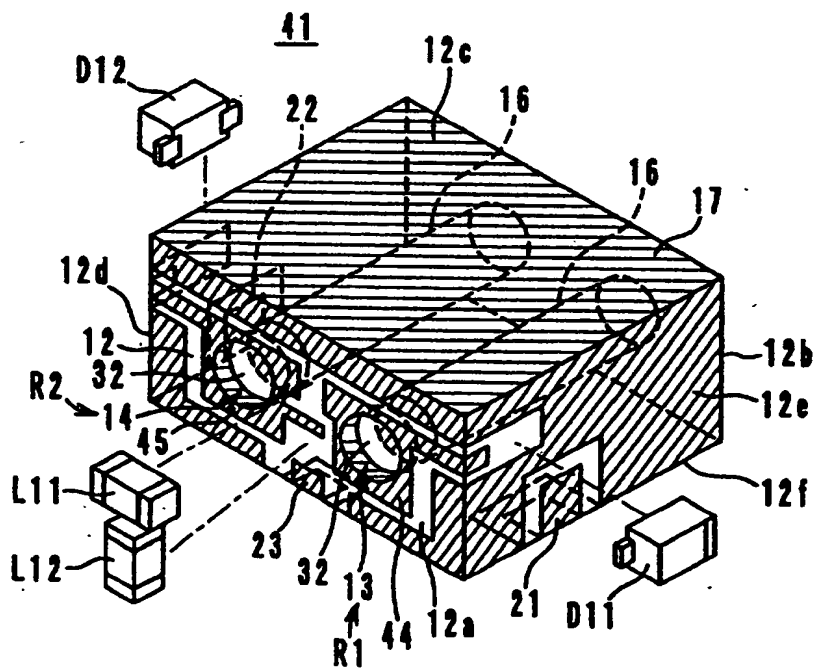

【図7】 [FIG. 7]

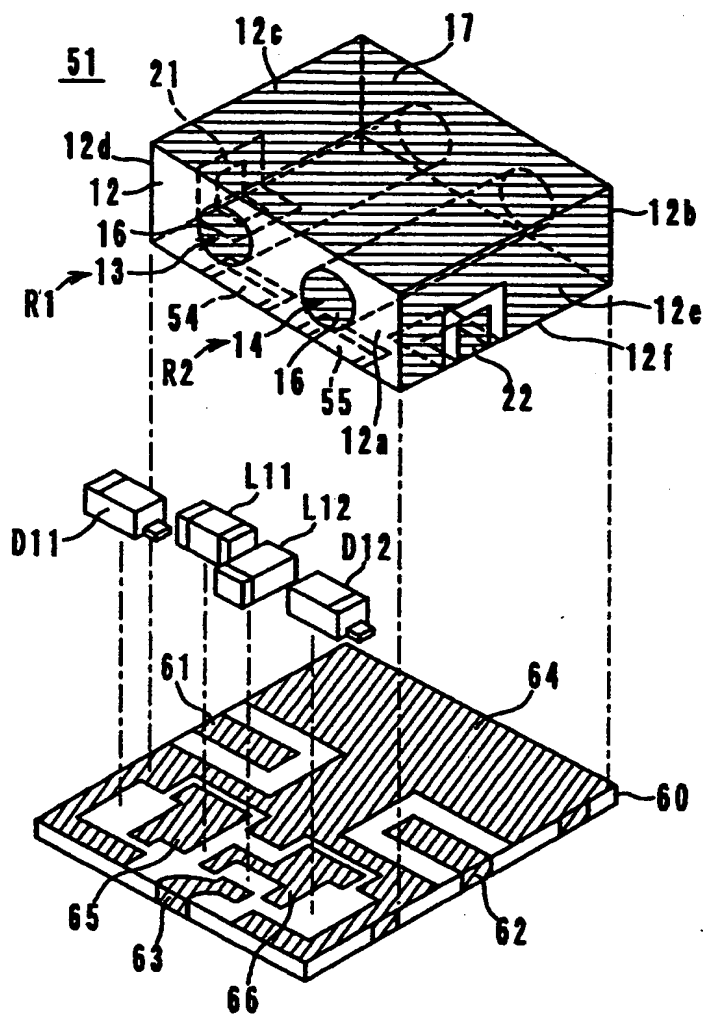


~~【図8】~~ [FIG. 8.]

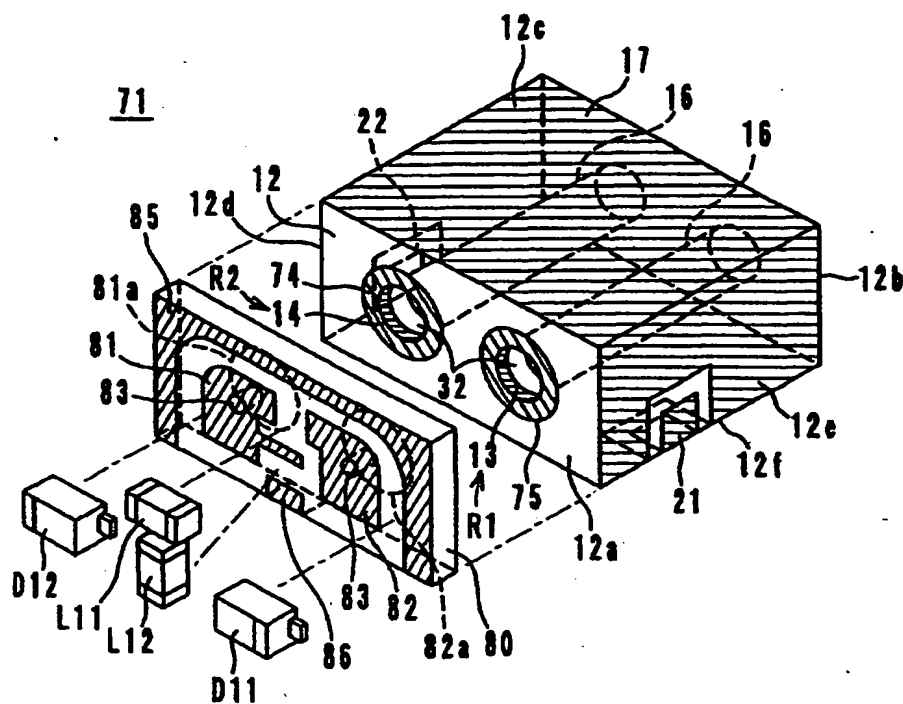




~~【図10】~~ [FIG.10]

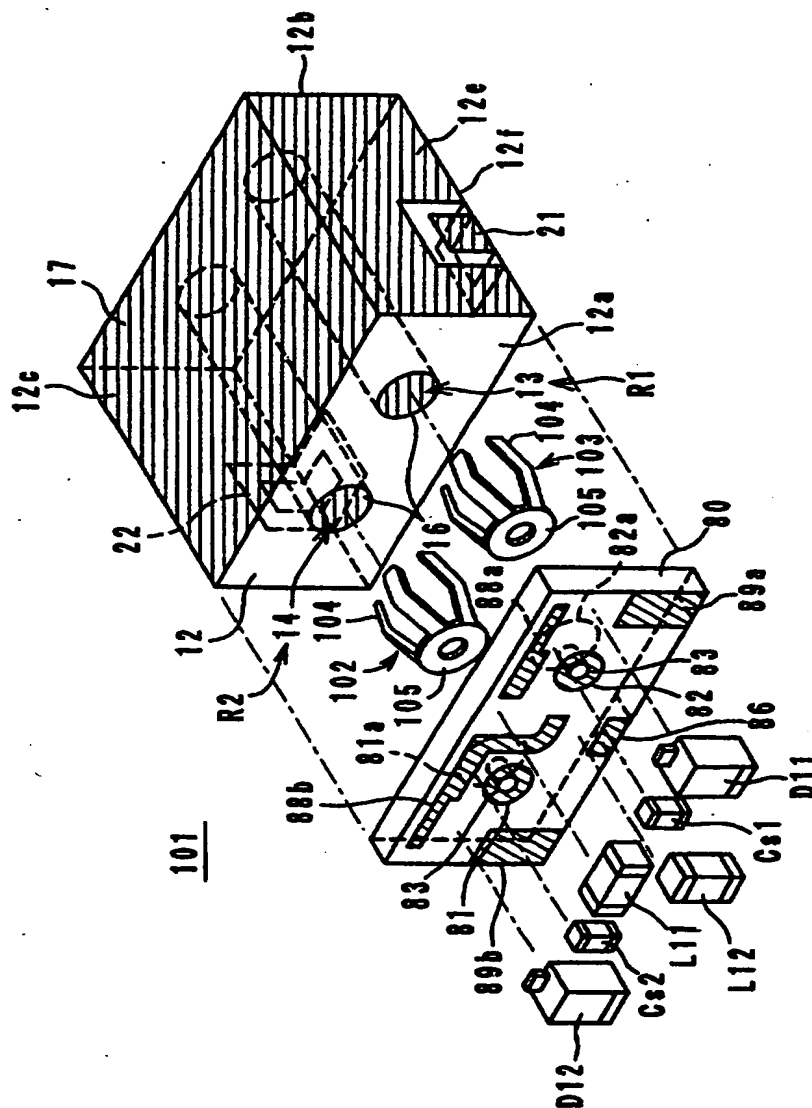


~~【図11】~~ [FIG. 11]

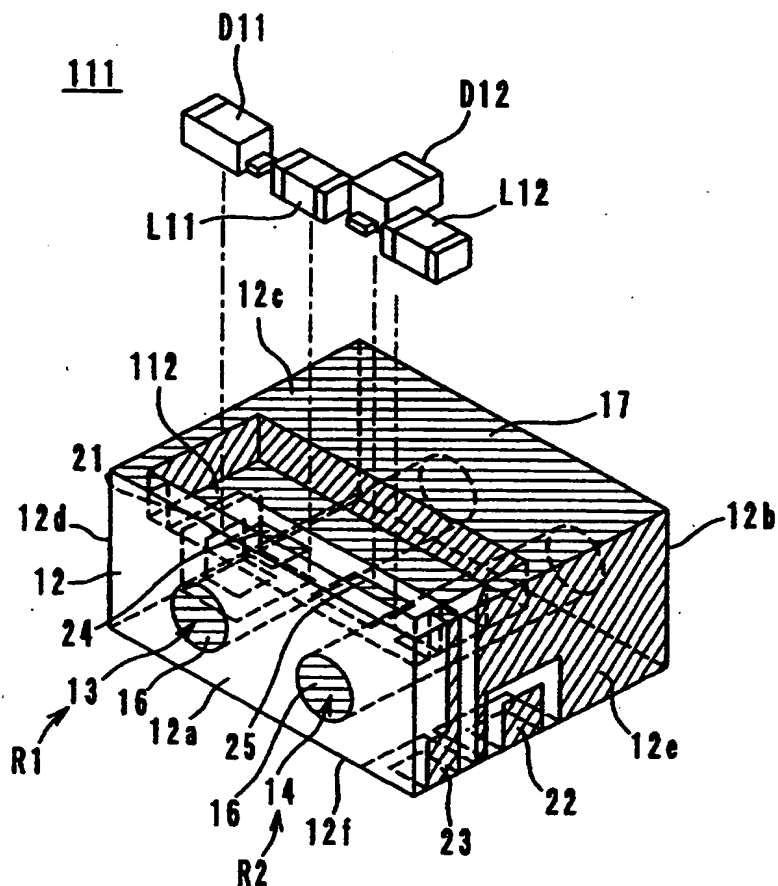





~~【図12】~~ [FIG.12]


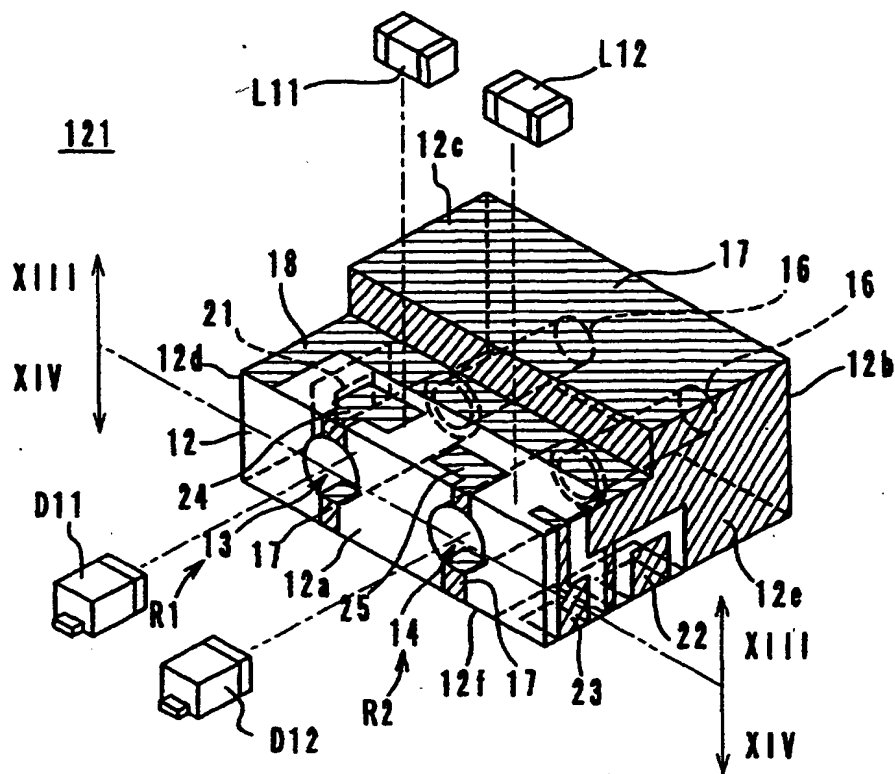


~~【図13】~~ [FIG. 13]

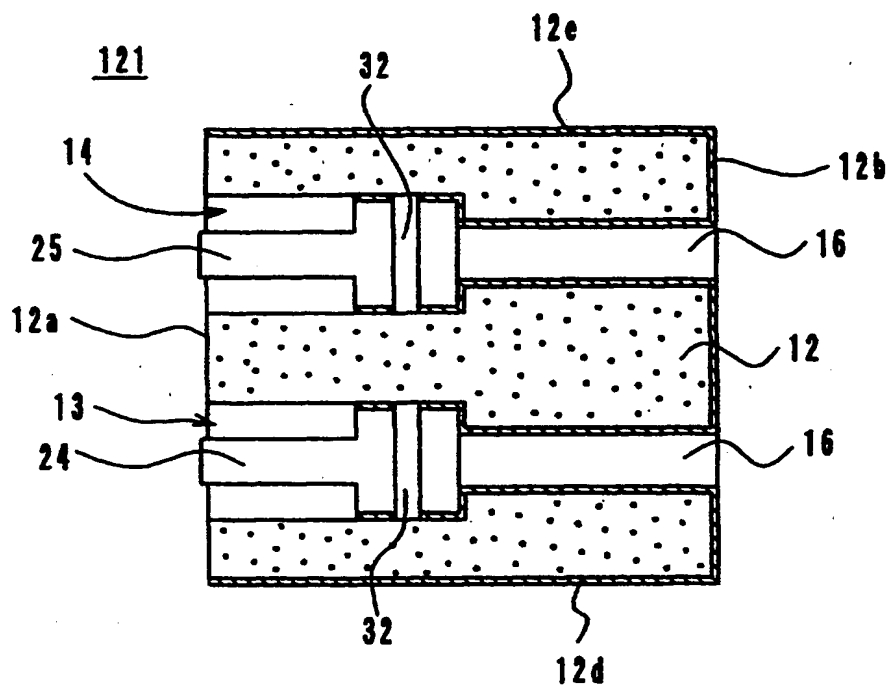


~~【図14】~~ [FIG. 14]

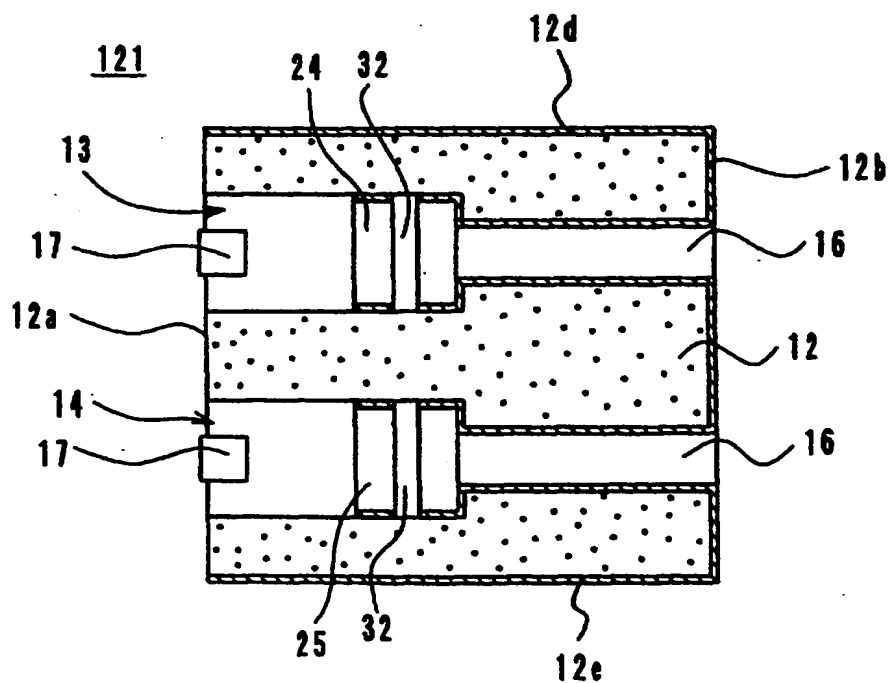


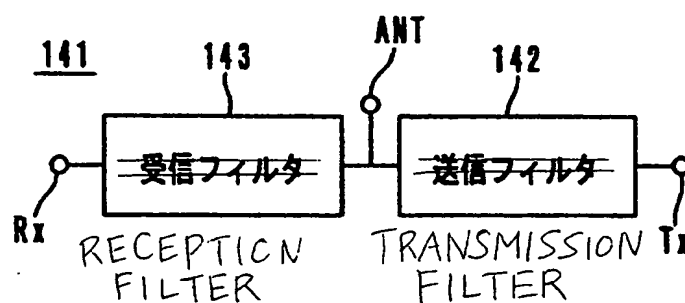

~~FIG. 17~~ [FIG. 17]

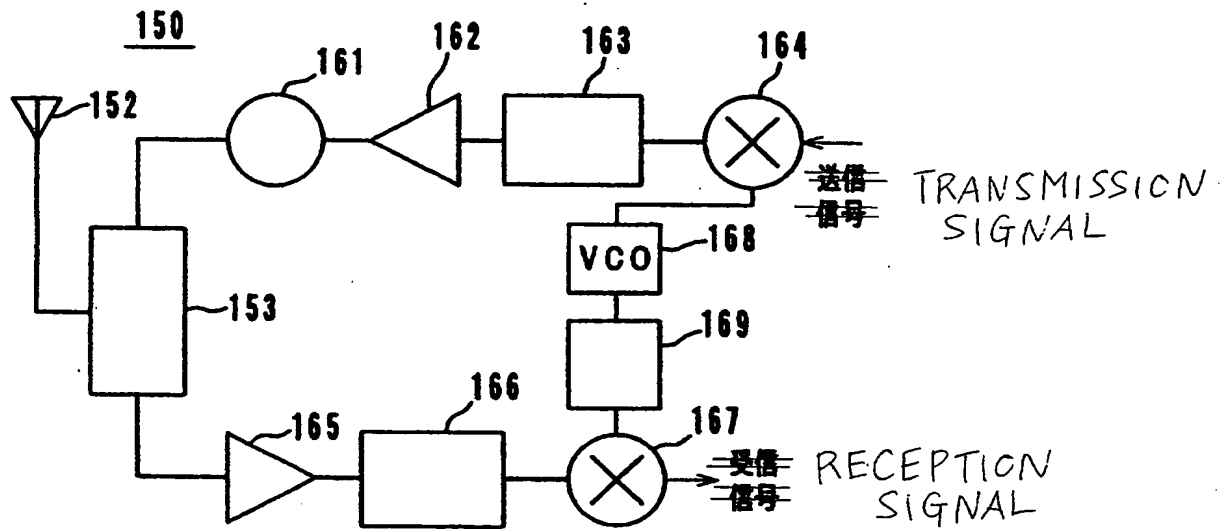

~~FIG. 18~~ [FIG. 18]

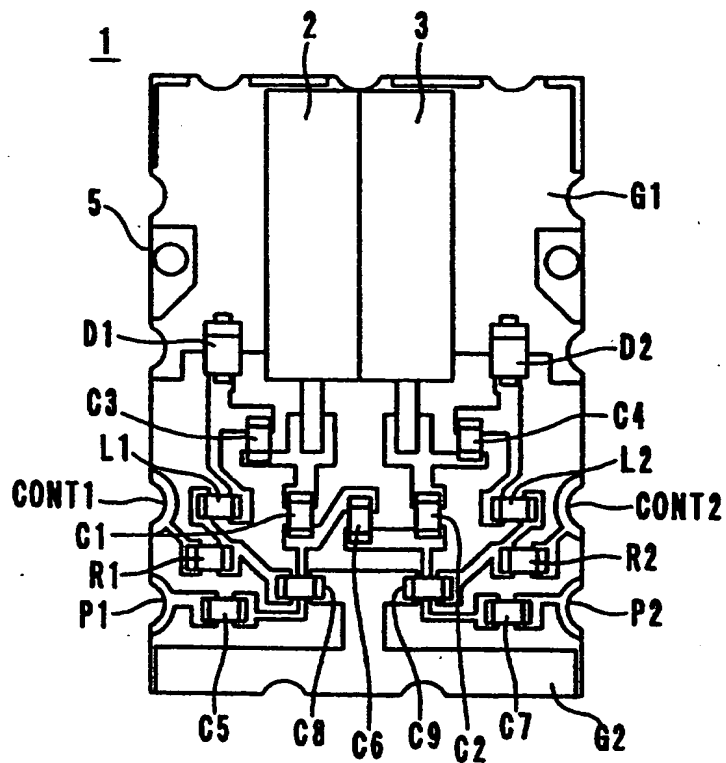

~~【図19】~~ [FIG. 19]

